


Model -DF140B1 : D Type LyTec Fiber (BLUE)


D 型麗特冷光綫 (藍色)

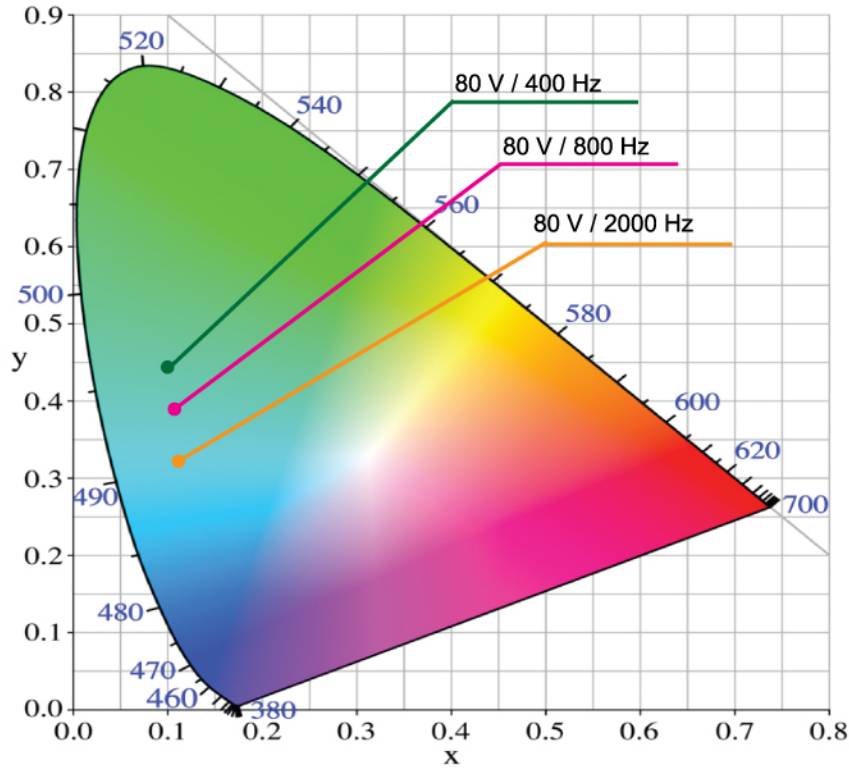

Typical Chromaticity Coordinates 冷光綫色度坐標

Voltage 電壓 Frequency 電頻	Chromaticity Coordinates 色度坐標	
	X	Y
80V / 400Hz	0.104	0.445
80V / 800Hz	0.102	0.398
80V / 2000Hz	0.110	0.328

Fiber Spectrum at 80V/2000Hz 冷光綫光譜在 80伏/2000赫茲

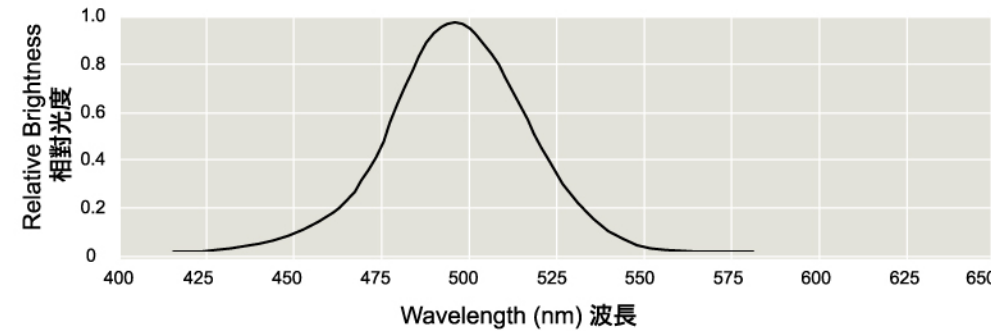

Typical Initial Reference Brightness (nit) 冷光綫始光度參考值

V, 伏	200Hz	400Hz	800Hz	2000Hz	4000Hz
40V	-	2.5	4.5	7.0	9.0
50V	-	5.5	9.0	14.5	18.5
60V	-	9.5	15.0	24.0	31.5
70V	-	14.0	22.0	36.0	47.5
80V	-	18.5	30.0	49.5	65.5

Typical Initial Reference Brightness 冷光綫始光度參考值

