




# Model - GP123G1 : General Purpose LyTec Fiber (GREEN)


## 通用型麗特冷光綫 (綠色)

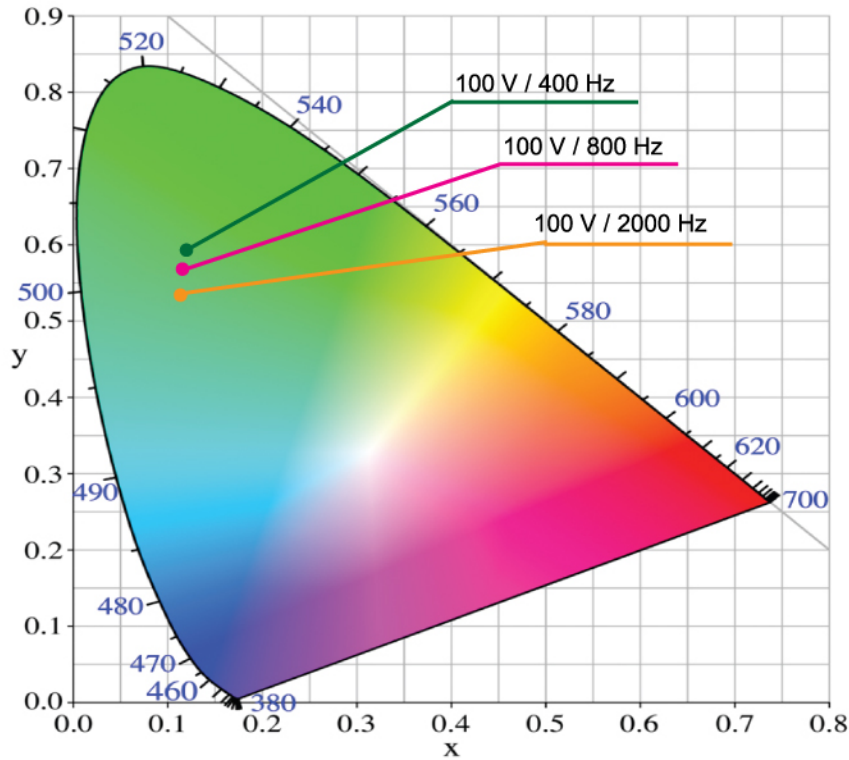

Typical Chromaticity Coordinates 冷光綫色度坐標

Voltage 電壓 Frequency 電頻	Chromaticity Coordinates 色度坐標	
	X	Y
100V / 400Hz	0.138	0.587
100V / 800Hz	0.137	0.573
100V / 2000Hz	0.136	0.549

Fiber Spectrum at 100V/2000Hz 冷光綫光譜在100伏/2000赫茲

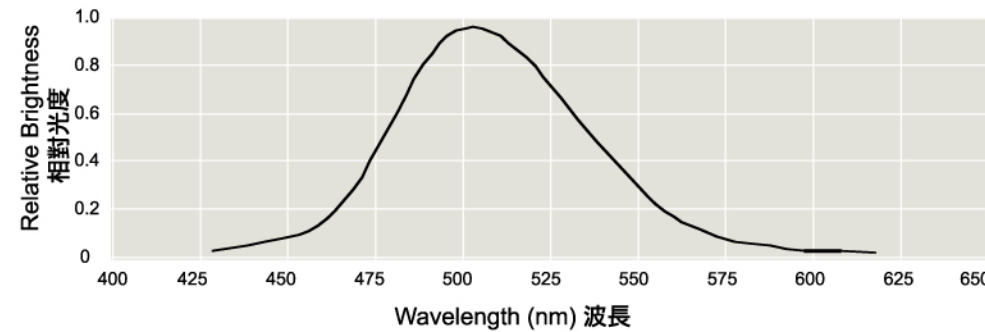

Typical Initial Reference Brightness (nit) 冷光綫始光度參考值

V, 伏	200Hz	400Hz	800Hz	2000Hz	4000Hz
40V	0.4	1.0	1.6	2.9	3.8
60V	3.0	5.8	10.2	16.3	22.9
80V	8.0	13.2	22.6	37.1	52.2
100V	14.8	22.7	39.0	64.1	85.2
120V	23.0	33.5	58.2	96.6	126.0

Typical Initial Reference Brightness 冷光綫始光度參考值

