




# Model - GP123S1 : General Purpose LyTec Fiber (PINK)


## 通用型麗特冷光綫 (粉紅色)

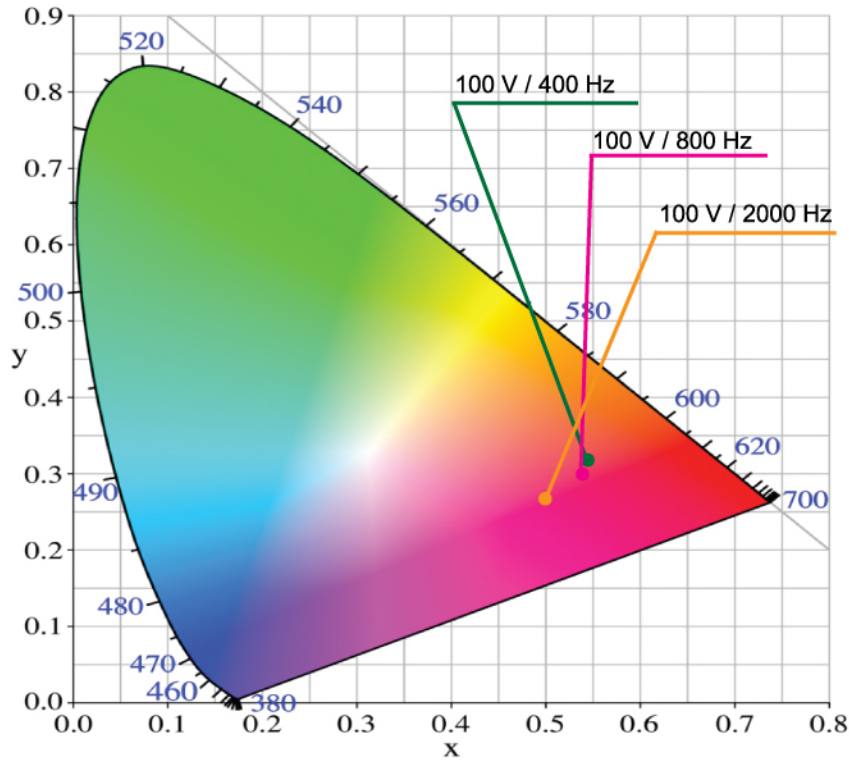

Typical Chromaticity Coordinates 冷光綫色度坐標

Voltage 電壓 Frequency 電頻	Chromaticity Coordinates 色度坐標	
	X	Y
100V / 400Hz	0.545	0.322
100V / 800Hz	0.532	0.314
100V / 2000Hz	0.504	0.293

Fiber Spectrum at 100V/2000Hz 冷光綫光譜在100伏/2000赫茲

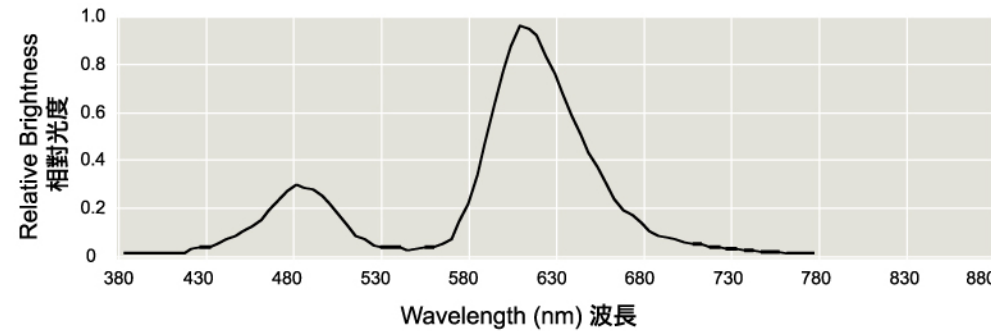

Typical Initial Reference Brightness (nit) 冷光綫始光度參考值

V, 伏	200Hz	400Hz	800Hz	2000Hz	4000Hz
40V	0.3	0.6	0.9	1.6	2.1
60V	1.6	3.0	4.7	8.8	12.1
80V	4.0	7.5	12.1	22.4	31.2
100V	7.3	13.4	22.6	41.5	58.8
120V	11.2	20.6	34.6	64.5	93.5

Typical Initial Reference Brightness 冷光綫始光度參考值

