




Model - HB125G1 : High Bright LyTec Fiber (GREEN)


高亮度麗特冷光綫 (綠色)

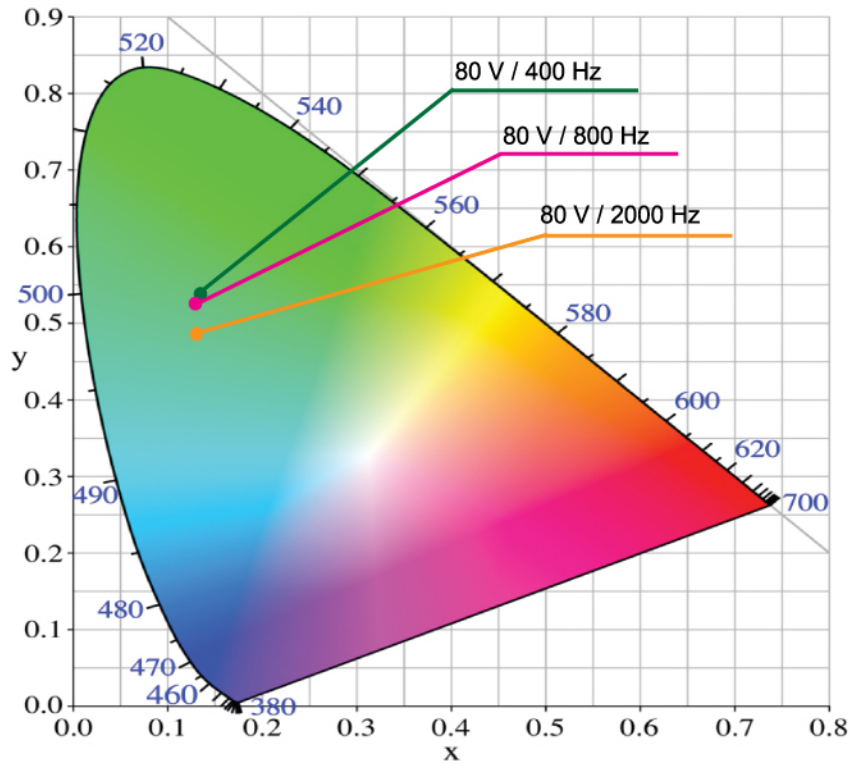

Typical Chromaticity Coordinates 冷光綫色度坐標

Voltage 電壓 Frequency 電頻	Chromaticity Coordinates 色度坐標	
	X	Y
80V / 400Hz	0.131	0.552
80V / 800Hz	0.130	0.530
80V / 2000Hz	0.129	0.471

Fiber Spectrum at 80V/2000Hz 冷光綫光譜在 80伏/2000赫茲

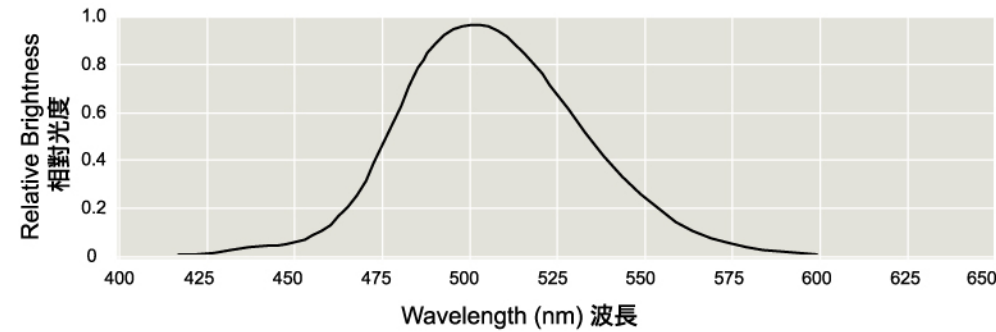

Typical Initial Reference Brightness (nit) 冷光綫始光度參考值

V, 伏	200Hz	400Hz	800Hz	2000Hz	4000Hz
40V	-	4.7	7.3	11.1	13.9
50V	-	9.8	15.4	23.0	29.0
60V	-	16.5	25.8	39.3	49.7
70V	-	24.6	38.8	59.8	75.8
80V	-	33.1	53.5	82.3	104.1

Typical Initial Reference Brightness 冷光綫始光度參考值

