


Model - HB125L1 : High Bright LyTec Fiber (LIME)


高亮度麗特冷光綫 (青綠色)

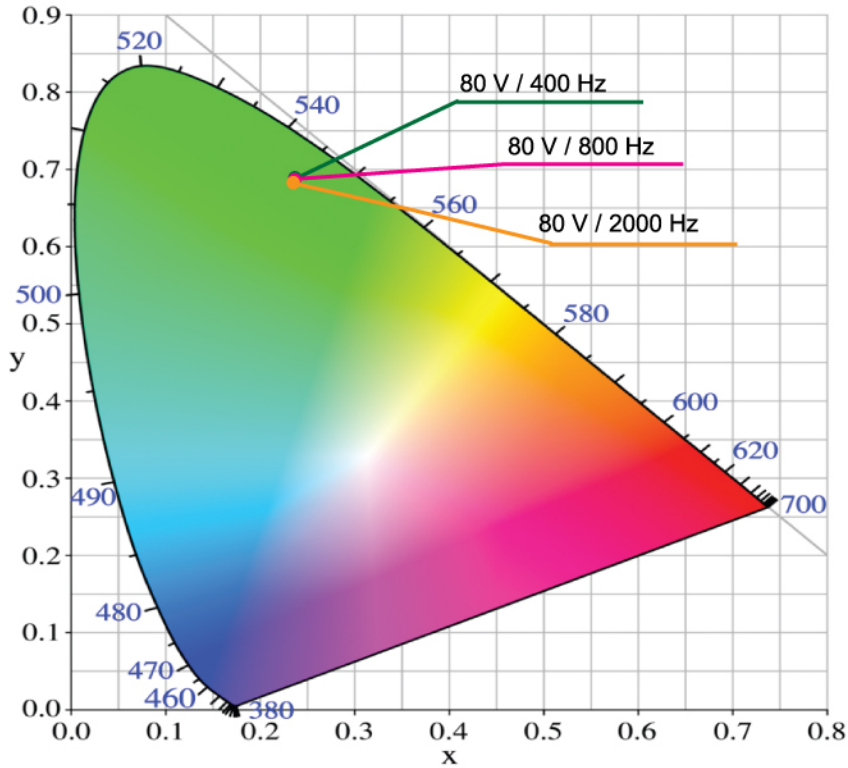

Typical Chromaticity Coordinates 冷光綫色度坐標

Voltage 電壓 Frequency 電頻	Chromaticity Coordinates 色度坐標	
	X	Y
80V / 400Hz	0.247	0.680
80V / 800Hz	0.247	0.679
80V / 2000Hz	0.248	0.674

Fiber Spectrum at 80V/2000Hz 冷光綫光譜在 80伏/2000赫茲

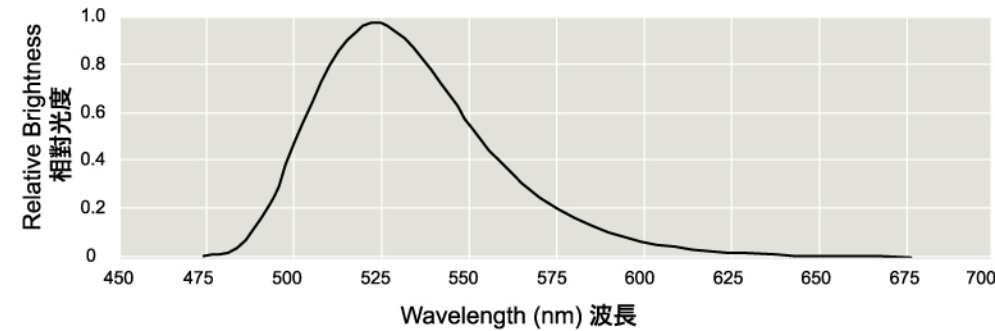

Typical Initial Reference Brightness (nit) 冷光綫始光度參考值

V, 伏	200Hz	400Hz	800Hz	2000Hz	4000Hz
40V	-	8.0	14.0	23.0	33.0
50V	-	16.5	27.5	47.5	69.5
60V	-	27.5	46.0	79.5	115.5
70V	-	40.0	68.5	120.5	172.0
80V	-	55.0	93.5	165.5	238.5

Typical Initial Reference Brightness 冷光綫始光度參考值

