





Model - HB125R1 : High Bright LyTec Fiber (RED) 高亮度麗特冷光綫 (紅色)

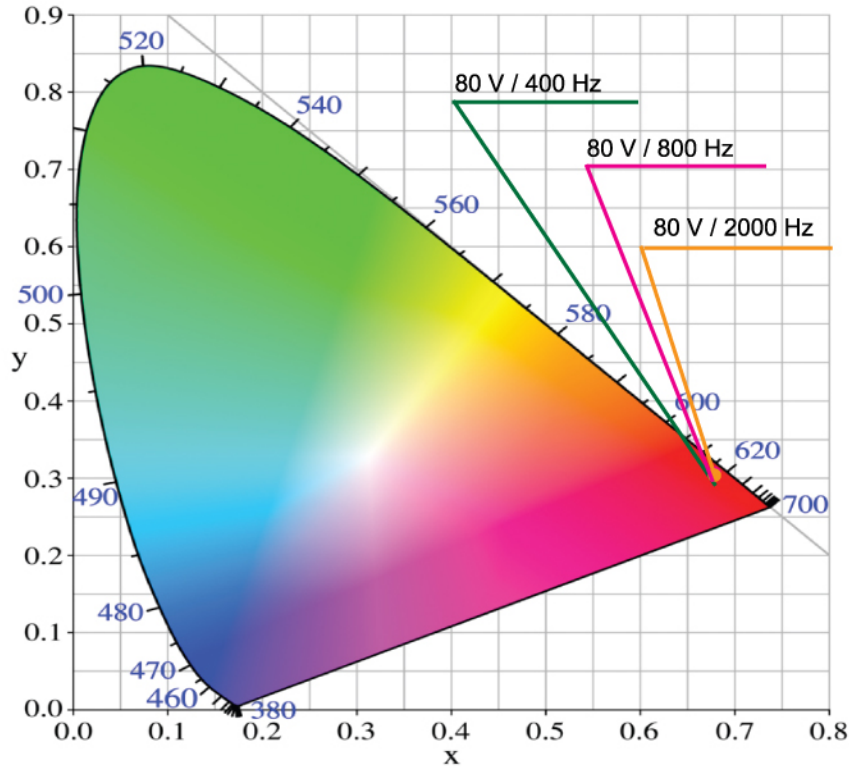

Typical Chromaticity Coordinates 冷光綫色度坐標

Voltage 電壓 Frequency 電頻	Chromaticity Coordinates 色度坐標	
	X	Y
80V / 400Hz	0.674	0.321
80V / 800Hz	0.676	0.322
80V / 2000Hz	0.678	0.322

Fiber Spectrum at 80V/2000Hz 冷光綫光譜在 80伏/2000赫茲

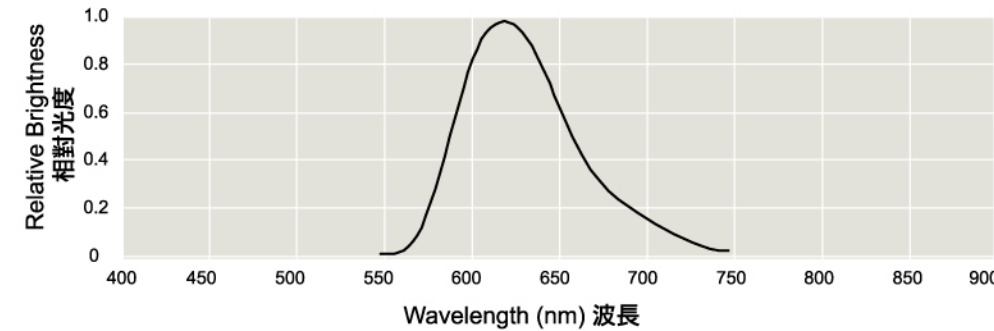

Typical Initial Reference Brightness (nit) 冷光綫始光度參考值

V, 伏	200Hz	400Hz	800Hz	2000Hz	4000Hz
40V	-	1.8	3.0	5.0	7.5
50V	-	3.5	5.5	10.5	15.5
60V	-	5.5	9.5	17.5	26.5
70V	-	8.5	14.0	26.0	40.0
80V	-	11.5	19.5	35.5	54.5

Typical Initial Reference Brightness 冷光綫始光度參考值

