





Model - HB125S1 : High Bright LyTec Fiber (PINK) 高亮度麗特冷光綫 (粉紅色)

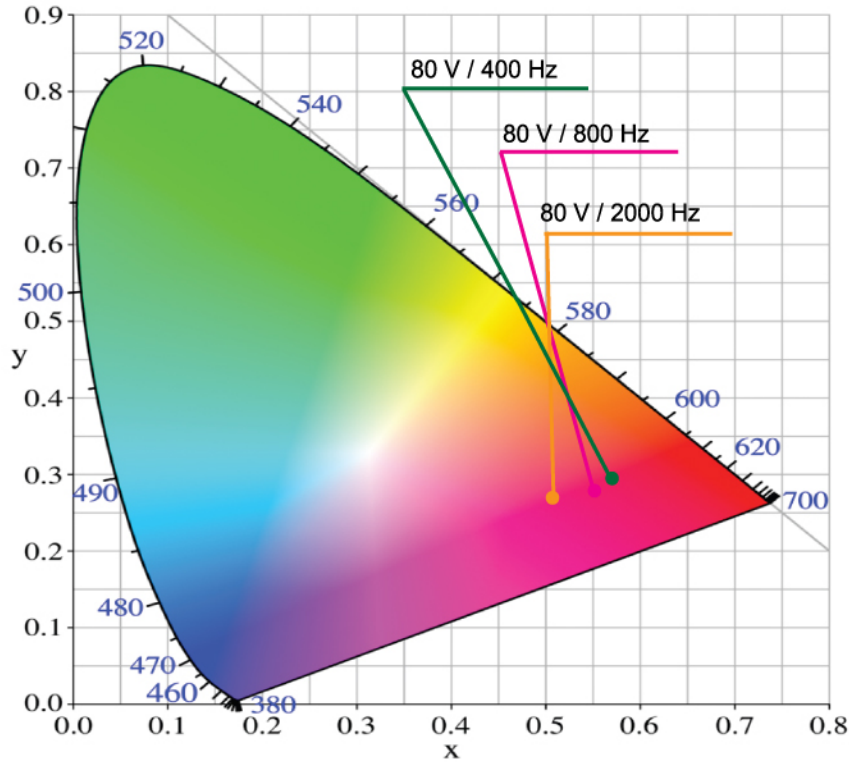

Typical Chromaticity Coordinates 冷光綫色度坐標

Voltage 電壓 Frequency 電頻	Chromaticity Coordinates 色度坐標	
	X	Y
80V / 400Hz	0.571	0.310
80V / 800Hz	0.553	0.299
80V / 2000Hz	0.512	0.275

Fiber Spectrum at 80V/2000Hz 冷光綫光譜在 80伏/2000赫茲

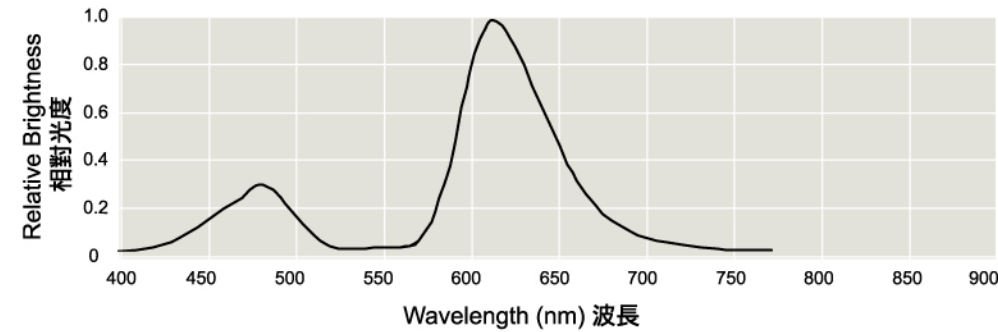

Typical Initial Reference Brightness (nit) 冷光綫始光度參考值

V, 伏	200Hz	400Hz	800Hz	2000Hz	4000Hz
40V	-	2.5	4.5	7.5	10.5
50V	-	5.5	9.0	15.5	22.5
60V	-	9.5	16.0	27.5	38.0
70V	-	14.0	23.0	40.0	56.0
80V	-	19.0	31.5	55.0	78.5

Typical Initial Reference Brightness 冷光綫始光度參考值

