





# Model - MN112R1 : Mini LyTec Fiber (RED) 微型麗特冷光線 (紅色)

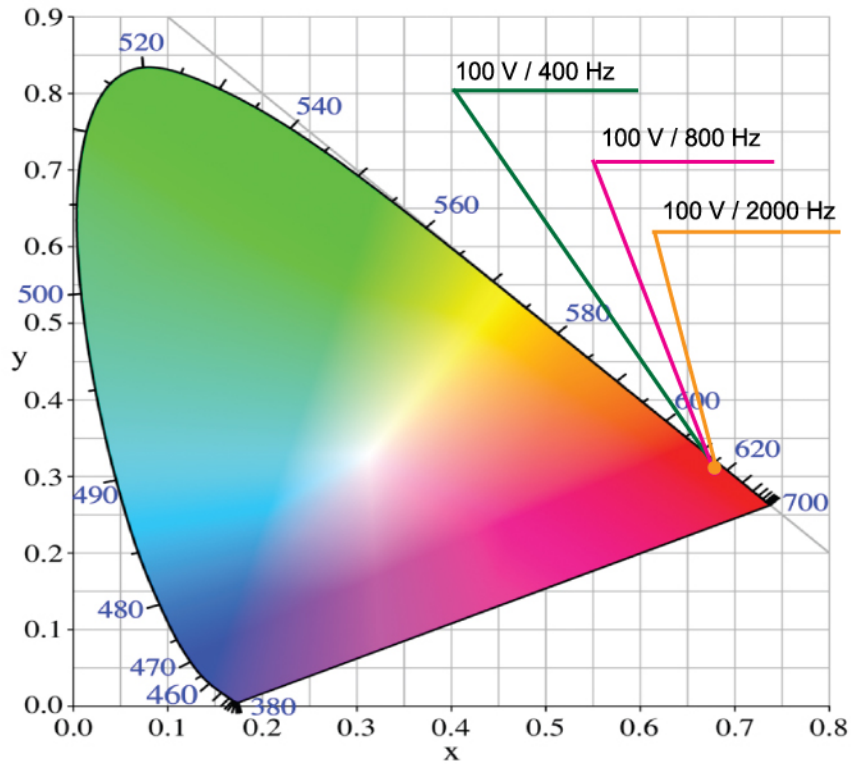

Typical Chromaticity Coordinates 冷光線色度坐標

Voltage 電壓 Frequency 電頻	Chromaticity Coordinates 色度坐標	
	X	Y
100V / 400Hz	0.682	0.315
100V / 800Hz	0.683	0.314
100V / 2000Hz	0.684	0.312

Fiber Spectrum at 100V/2000Hz 冷光線光譜在 100伏/2000赫茲

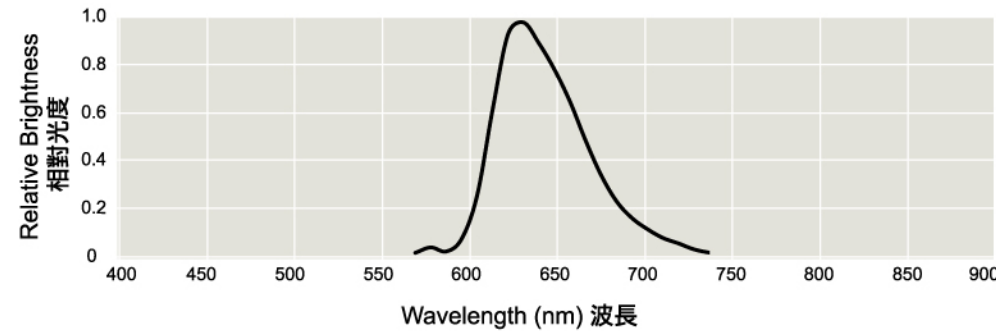

Typical Initial Reference Brightness (nit) 冷光線始光度參考值

V, 伏	200Hz	400Hz	800Hz	2000Hz	4000Hz
40V	0.2	0.3	0.4	0.8	1.2
60V	0.8	1.4	2.2	4.2	6.4
80V	1.9	3.5	5.8	10.7	16.2
100V	3.4	6.2	9.6	20.0	30.0
120V	5.2	9.4	16.5	30.7	47.2

Typical Initial Reference Brightness 冷光線始光度參考值

