



# Model - TD150L1 : Thick LyTec Fiber (LIME) 特厚型麗特冷光綫 (青綠色)

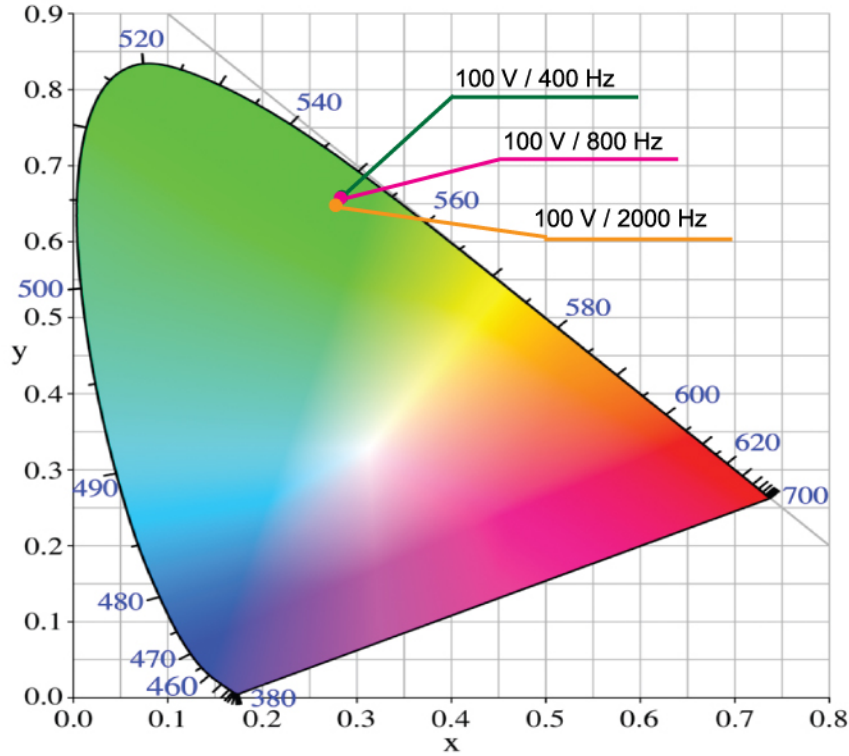

Typical Chromaticity Coordinates 冷光綫色度坐標

Voltage 電壓 Frequency 電頻	Chromaticity Coordinates 色度坐標	
	X	Y
100V / 400Hz	0.270	0.674
100V / 800Hz	0.270	0.674
100V / 2000Hz	0.271	0.674

Fiber Spectrum at 100V/2000Hz 冷光綫光譜在100伏/2000赫茲

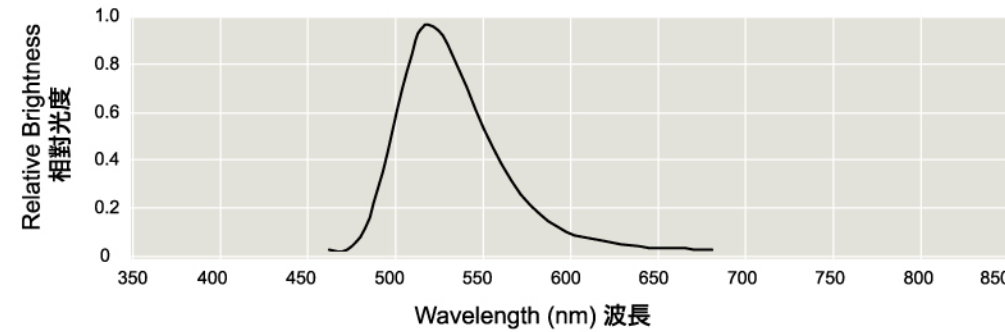

Typical Initial Reference Brightness (nit) 冷光綫始光度參考值

V, 伏	200Hz	400Hz	800Hz	2000Hz	4000Hz
60V	-	-	-	-	-
80V	-	35.0	56.0	97.0	136.0
100V	-	60.0	98.0	174.0	250.0
120V	-	88.0	148.0	269.0	383.0
140V	-	121.0	206.0	368.0	542.0

Typical Initial Reference Brightness 冷光綫始光度參考值

